

Transforming the Network with Brocade Campus Fabric

HIGHLIGHTS

- Brocade Campus Fabric technology brings campus networks into the modern era to better support seamless wireless mobility and network security and to ease application deployment.
- This innovative technology collapses multiple network layers into a single logical switch, flattening the network and eliminating deployment complexity while simplifying network management and reducing operating costs.
- Brocade Campus Fabric technology reduces unnecessary network layers to create large management domains that eliminate individual switch touch points, reducing maintenance time and costs.
- This technology allows premium and entry-level switches to mesh together into a single logical switch and share advanced Layer 2 and Layer 3 (L2/L3) services, delivering lower price-per-port functionality without compromising performance.
- Brocade Campus Fabric technology integrates high-performance, fixed form factor switches to create a single distributed logical switch that is independent of physical location and that allows organizations to add ports whenever and wherever needed across the campus without adding complexity.

Traditional Campus Architectures Struggle to Meet Today's Application Requirements

For the past two decades, campus network design has seen little innovation, as market leaders have promoted the status quo with no significant investments beyond incremental “speeds and feeds” enhancements. Years of incremental technology upgrades have turned traditional legacy campus networks, into a complex and fragmented patchwork of network devices.

Campus networking has reached a point where traditional network architectures are struggling to keep up with users' relentless demands for seamless mobility across the campus and pervasive access to latest-generation applications. It is increasingly challenging for IT departments to maintain network Service Level Agreements (SLAs) and to enforce specific access policies across a broad range of wired and wireless users and devices. Legacy campus networks suffer from various issues as technology advances, including:

- **Complex:** Legacy campus networks are managed one switch at a time. Network teams are required to connect to each individual network device to provision resources, apply configuration changes, and deploy network policies. The burden is on the network administrator to keep the network consistent and all network device configurations in sync.

- **Inefficient:** A typical legacy campus network includes multiple network layers that run inefficient legacy protocols such as Spanning Tree Protocol (STP), where only half of the links between layers are active, and the remaining links act as backups in case the primary link fails. Overcoming the limitations associated with STP requires the use of Layer 3 protocols, which add to the management complexity of such solutions.
- **Fragmented:** Legacy networks include many different network devices running various network Operating System (OS) platforms and versions. Each network device offers different levels of Layer 2/ Layer 3 network services, based on the capability of each device and the types of software licenses that are activated.
- **Rigid:** Traditional three-tier network designs with “big-box” chassis at the aggregation and core layers require a significant upfront investment. Also, they are frequently deployed with vacant slots to support additional capacity that might be required in the future. Modular chassis solutions also provide limited deployment flexibility and require a “fork-lift” upgrade to move up to the next capacity level.

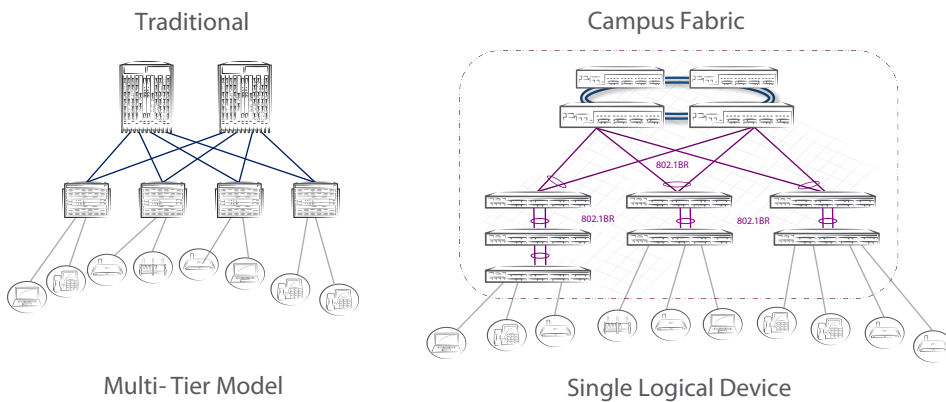


Figure 1. Brocade Campus Fabric architecture versus a traditional multi-tier campus network.

Just like data center networks experienced a transformation a few years ago to support virtualization and virtual machine mobility, the time has come for campus networks to undergo a similar transformation to support seamless user mobility and pervasive access to applications anytime and anywhere.

Brocade Campus Fabric: A Radically Different Approach to Campus Networking

Brocade® Campus Fabric collapses multiple network layers into a single logical device, combining the power of a “distributed chassis” design with the flexibility and cost-effectiveness of fixed form factor switch building blocks.

- **Centralized control:** The traditional aggregation/core layer is replaced by a stack of high-performance 10 Gigabit Ethernet (GbE)/40 GbE fixed form factor switches that are connected together through a high-speed “campus ring” that can span up to 10 kilometers (km). These switches are the Control Bridge (CB) devices. Together they deliver a unified network control plane that acts as the central management and traffic forwarding authority for the entire campus fabric domain.

- **The edge extends the core:** At the edge of the network, the access layer is replaced by a set of Port Extender (PE) devices connected directly or indirectly to the stack of CB devices. Using the “distributed chassis” metaphor, you can consider these PE devices to be “virtual line cards.” They are transparently managed and controlled by the CB, eliminating the need to manually provision and configure individual edge switches. In fact, the entire campus fabric domain is managed as one logical device from a single point of management within the CB.

The CB and PE devices use the standard based 802.1br protocol to communicate between themselves. From the outset, the whole Brocade Campus Fabric domain appears as a single logical switch to the edge devices connected to it and from the core.

Brocade Campus Fabric Combines the Benefits of Chassis and Stackable Designs

Simplified Operations

- **Simplified deployment:** Brocade Campus Fabric collapses multiple network layers into a single logical device, flattening the network and eliminating deployment complexity and arbitrary network segmentation between office floors, buildings, and other geographical locations.
- **Simplified management:** The entire network is managed from a single point, including all ports attached to the CB and PE devices. The network administrator can deploy network policies across the campus from a single point of management.
- **Simplified application provisioning:** The flattened network simplifies the deployment of applications and the implementation of network services. To enable security, unified communications, voice, or multi-tenancy services no longer requires tedious Virtual Local Area Network (VLAN) provisioning across multiple switches and closets. This is because Brocade Campus Fabric offers a single logical device across the campus network. The VLANs only need to be provisioned once and are shared across the fabric.

Improved Scalability and Performance

- **Elimination of STP inefficiency:** The entire domain runs from a unified control and forwarding plane, eliminating the need to deploy a loop avoidance protocol, such as STP within the fabric domain, or complex Layer 3 protocols such as Open Shortest Path First (OSPF). Multi-pathing is supported by design within a campus fabric domain: All links between switches are active at all times, and traffic is load balanced, optimizing performance while delivering fast failover recovery from link failure with no impact on network service.
- **Seamless mobility:** Brocade Campus Fabric architecture flattens the network, eliminating arbitrary Layer 3 boundaries between physical locations. This architecture simplifies the deployment of wireless access points and delivers a better user experience. For example, seamless roaming is enabled between Wi-Fi access points across the campus. Users can enjoy uninterrupted access to their favorite applications, including voice and streaming video services, while they roam across the campus with their portable devices.

- **High Availability Design:** Brocade CB technology at the core of the fabric delivers high availability and enables instantaneous hitless failover to a standby CB in the event of a failure of the master CB. Organizations also can use hot-insertion/removal of fabric units (CBs or PEs) to avoid interrupting service when adding a unit to increase the capacity of the fabric or replacing a unit that needs servicing.

Brocade ICX® 7750 CB units also support stack level In Service Software Upgrade (ISSU*), a unique capability that enables the stack of Brocade ICX 7750 CBs at the core of the fabric to go through a software upgrade without service interruption.

Lower Cost of Acquisition and Operation

- **“Pay as you grow” design:** The Brocade fixed form factor based design enables cost-effective scale-out networking. It adds PE devices when more ports are needed at the edge and adds CB devices when more ports are needed at the aggregation layer. Unlike traditional chassis-based aggregation switches, no excess idle capacity is required, and no “fork-lift” upgrade is needed to advance to the next capacity level.

- **Seamless migration:** Brocade Campus Fabric interoperates with traditional networks, so there is no need to migrate the whole network at once. Brocade ICX 7750 Switches can act simultaneously as a CB on ports that are connected to PE devices and as a regular Layer 2/ Layer 3 aggregation switch on ports that are connected to regular access switches, enabling a gradual migration strategy.
- **Unified features and services:** All devices within a Brocade Campus Fabric domain offer the same level of network services and software features, since they are all part of the same logical switch. All advanced services running at the aggregation layer, such as premium Layer 3 features, are available seamlessly from all network edge ports. Additionally, software images running on the various devices are automatically updated and kept in sync, so that there is no risk of version mismatch between the various devices, thus eliminating potential network downtime.

Brocade Campus Fabric Goes Beyond Competitive Solutions

The Brocade Campus Fabric goes beyond competitive 802.1br based campus solutions with the following features:

- **Distributed Control Bridge Architecture:** Competitive chassis-based solutions require a significant upfront investment, because the large chassis-based CB that represents the core of the solution is expensive to acquire and maintain. Brocade takes the architecture to the next level by offering a Distributed Chassis based solution as the aggregation/core CB, including a “pay as you grow” model that allows customers to start small and upgrade as needs grow.

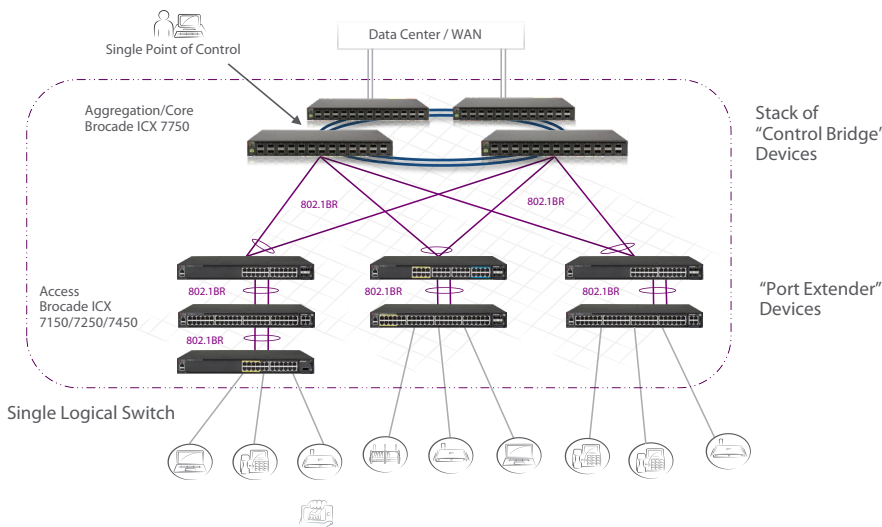


Figure 2. Brocade Campus Fabric combines multiple network layers into a single logical device.

• **Multi-Purpose Port Extender Devices:**

Unlike competitive solutions that require single-purpose and custom-built extender devices with limited functionality, Brocade offers PE mode on standard, full-featured Brocade ICX 7150, Brocade ICX 7250, and Brocade ICX 7450 Series switches. Customers can easily store spares, manage inventory, and evolve the network architecture as needs grow. Customers can also use the same devices in multiple deployment scenarios, use devices as standalone switches, and use devices in a stack or as part of a Brocade Campus Fabric.

Brocade Campus Fabric Technology Support Across the Brocade ICX 7000 Product Line

The Brocade ICX product portfolio is designed to address a broad range of use cases, catering to different markets with solutions for campus access and aggregation. The Brocade Campus Fabric solution was conceived with maximum flexibility in mind and is intended to cover the needs of existing and future customers using the latest Brocade ICX 7000 Series switches. Brocade intends to support Brocade Campus Fabric on all existing and future Brocade ICX 7000 Series switches.

Unlike competitive solutions, Brocade ICX 7000 switches are flexible enough to operate both as regular Layer 2/Layer 3 switches, as well as running in PE mode (with the Brocade ICX 7150 Switch, the Brocade 7250 Switch, and the Brocade 7450 Switch) or CB mode (with the Brocade ICX 7750 Switch). No licensing cost is associated with Brocade Campus Fabric technology, and the technology comes with Brocade ICX FastIron® software running on Brocade ICX 7000 Series switches.

Brocade Campus Fabric Enables Seamless Mobility and Effortless Networking

Brocade Campus Fabric offers a radically different approach that simplifies the deployment of campus networks,

providing a single point of management, configuration, and monitoring. It also unifies features, network services, and software images across the campus. Unlike competitive solutions, Brocade fixed form factor based 802.1br solutions enable scale-out networking with a “pay as you grow” deployment model.

About Brocade

Brocade networking solutions help organizations achieve their critical business initiatives as they transition to a world where applications and information reside anywhere. Today, Brocade is extending its proven data center expertise across the entire network with open, virtual, and efficient solutions built for consolidation, virtualization, and cloud computing. Learn more at www.brocade.com.

Table 1. Campus Fabric platform support and scalability specifications.

Feature	Specification
Fabric Control Bridge (CB) platform support	Brocade ICX 7750
Fabric Port Extender (PE) platform support	Brocade ICX 7150 Brocade ICX 7250 Brocade ICX 7450
Maximum CB units per fabric	12 (stacked)
Maximum PE units per fabric	36
Maximum PE cascade depth	6
Maximum distance between PE or CB units	10 km
Fabric port links (CB to PE and PE to PE)	10 Gbps links, 40 Gbps links, Link aggregation supported, 802.1br protocol

Corporate Headquarters

San Jose, CA USA
T: +1-408-333-8000
info@brocade.com

European Headquarters

Geneva, Switzerland
T: +41-22-799-56-40
emea-info@brocade.com

Asia Pacific Headquarters

Singapore
T: +65-6538-4700
apac-info@brocade.com



© 2016 Brocade Communications Systems, Inc. All Rights Reserved. 11/16 GA-WP-6132-00

Brocade, Brocade Assurance, the B-wing symbol, ClearLink, DCX, Fabric OS, HyperEdge, ICX, MLX, MyBrocade, OpenScript, VCS, VDX, Vplane, and Vyatta are registered trademarks, and Fabric Vision is a trademark of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned may be trademarks of others.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.

